



IP20-3014 Specification

Product Description:

120led/m, SMD3014, concolorous, non-waterproof 24v flexible led strip light

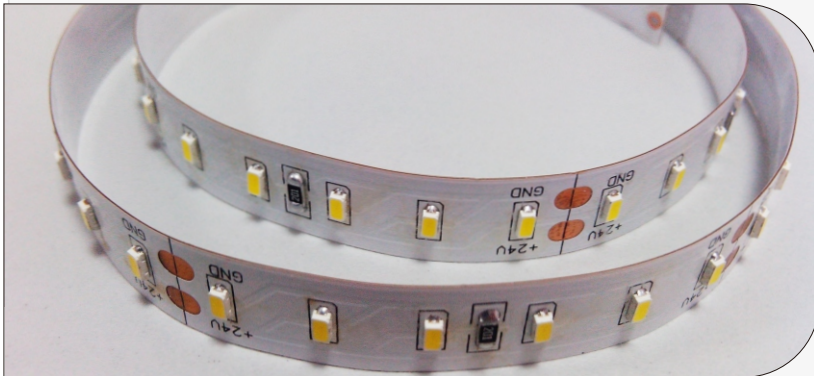

Dimension:



Unit:mm

Product Feature:

1. Very flexible, it can be turned according to your requirements, when the led light is turned on, the led strips are crystal and look more three-dimensional than the normal led strips
2. Adopting high quality and high brightness SMD3014, wide-angle, the light is evenly, low light decay;
3. Every 6leds for a unit and cuttable, many ways to install, very convenient
4. The voltage is DC24V, so it's safe to use the led strips;
5. Adopting high quality FPCB, good electric conduction and heat dissipation, safe to use;
6. Widely used in home and car decorations, sign, advertising signboard, public house, jewelry counter, place of entertainment, etc. Any colors can be customized, show you absolutely visual effects.

Parameter:

Power: 14.4W/m
 Input voltage: DC24V
 Size: 5000MM*10MM/ roll
 Wavelength: Red:626-630nm, Green:520-525nm, Blue: 465-470nm
 Luminous flux: 1200LM/m
 LED quantity: 120LED/m
 LED quantity/unit: 6leds
 Color: yellow/red/blue/green/warm white/pure white/cool white
 Beam Angle: 120°
 Working temperature: -40°C--+50°C
 Storage temperature: -50°C--+60°C

Installation:



Power supply: Using 24V consistent voltage.
 Power supply configuration: We recommend one 80W power supply for 5meters led strip.
 Connection: Notice the anode and cathode, please don't be opposite connecting.
 Cutting: 6LEDs for a unit, can be cut on every 6leds

Item No.	Color	Working voltage	Working current	Power	Beam angle	LED QTY	IP level
Warmweiß		DC 24V	0.6A/M	14.4W/M	120°	120	IP68
Naturweiß							IP67
Kaltweiß							IP65